

This page lists the contents included in the box. Please take time to identify the hardware as well as the individual components of the product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage. Please follow the assembly instructions closely. Improper assembly can result in personal or property damage.  
**Note: 2 adults are required to safely assemble this product.**

**CLEANING AND CARE:**



Dust surfaces with a dry soft cloth. Do not use polishes or cleaners on this lamp.

**! IMPORTANT SAFETY INSTRUCTIONS:**


If you are unsure about your ceiling type or what mounting method you should use, consult a qualified professional or your local hardware store.

**We recommend installation of this pendant lamp be performed by a licensed electrician.**

Suitable for dry locations only.

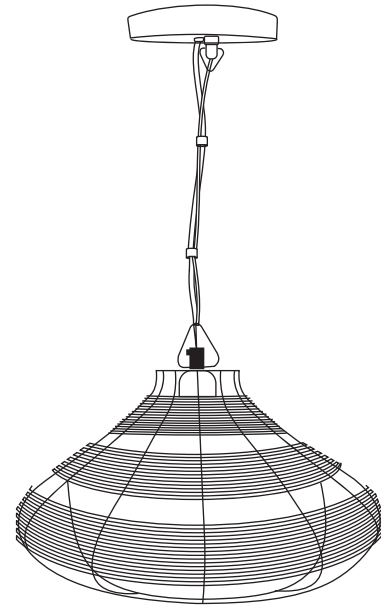

**HARDWARE**



2 - mounting bolts




2 - canopy bolts

**TOOLS REQUIRED**



allen wrench (INCLUDED)




Phillips head screwdriver

**COMPONENTS**



1 - mounting plate

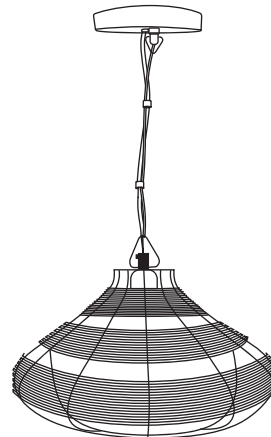


1 - pendant assembly



1 - 13 watt max CFL bulb (NOT INCLUDED)  
OR

1 - 60 watt max type A standard bulb (NOT INCLUDED)

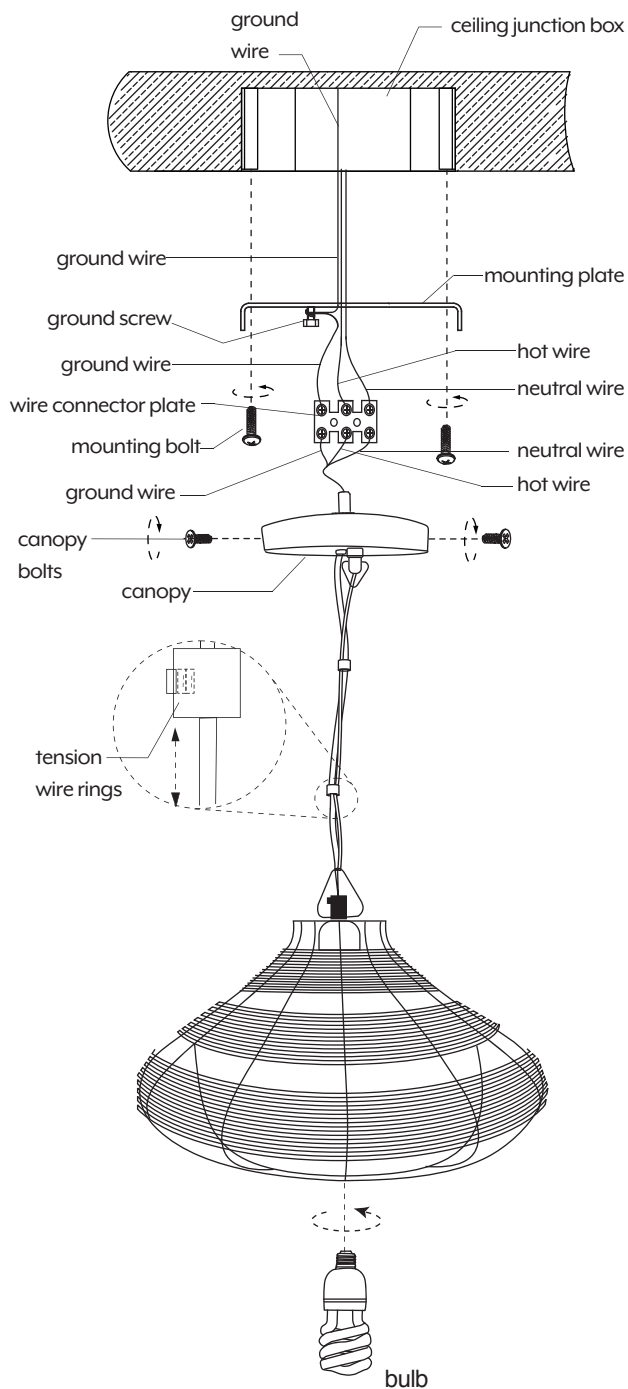

- 1) Shut off the main electrical supply from the main fuse box/circuit breaker.
  - 2) Carefully unpack all fixture parts and hardware. Lay items out on a clear workspace.
  - 3) Loosen the small screws on the **tension wire rings**, and pull the cord and tension wire through the canopy to desired height. Evenly space the **tension wire rings** and tighten the small screws with an **allen wrench** to secure into place. Neatly coil extra tension wire inside the canopy.
  - 4) Place the **mounting plate** over the center of the ceiling junction box.
  - 5) Align holes in **mounting plate** with holes in junction box and attach with 2 **mounting bolts**, using a **phillips head screwdriver**.
  - 6) Gently pull wiring down from ceiling junction box and allow it to hang.
  - 7) Carefully inspect the pendant's fixture wires:
    - *Neutral fixture wire = white*
    - *Hot fixture wire = black*
    - *Ground wire = green*
  - 8) Loosen ground screw on mounting plate. Wrap *ground wire* from junction box and *ground wire* from the wire connector plate/fixture around screw. Re-tighten the ground screw.
  - 9) Loosen the screws on the **wire connector plate**. Wrap the *neutral junction box wire* (usually white) around the screw on the wire connector plate and re-tighten.
  - 10) Wrap the *hot junction box wire* (usually black) around the screw on the wire connector plate and re-tighten.
- DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- 11) Gently tuck wire connections neatly into the ceiling junction box.
  - 12) Fit **canopy assembly** onto **mounting plate** and secure with 2 **Canopy bolts**, using a **phillips head screwdriver**.
  - 13) Insert 1 - **13 watt max CFL bulb** (not included) or 1 - **60 watt max type A standard bulb** (not included) into the socket. **DO NOT EXCEED SPECIFIED WATTAGE.**
  - 14) Restore power to junction box and test fixture.

Installation is now complete.