

This page lists the contents included in the box. Please take time to identify the hardware as well as the individual components of the product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage. Please follow the assembly instructions closely. Improper assembly can result in personal or property damage. **Note: 2 adults are required to safely assemble this product.**

**CLEANING AND CARE:**



Dust surfaces with a dry soft cloth. Do not use polishes or cleaners on this lamp.

**! IMPORTANT SAFETY INSTRUCTIONS:**

If you are unsure about your ceiling type or what mounting method you should use, consult a qualified professional or your local hardware store.

**We recommend installation of this pendant lamp be performed by a licensed electrician.**


Suitable for dry locations only.

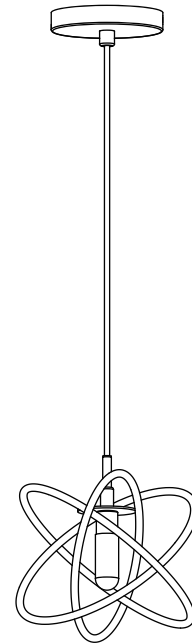

**HARDWARE**



2 - mounting bolts



2 - canopy bolts




2 - wire nuts


**TOOLS REQUIRED**



electrical tape




flat head screwdriver




phillips head screwdriver

**COMPONENTS**




1 - mounting plate

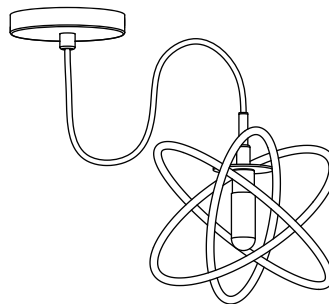

1 - pendant assembly



1 - 18 watt max G9 halogen bulb (NOT INCLUDED)

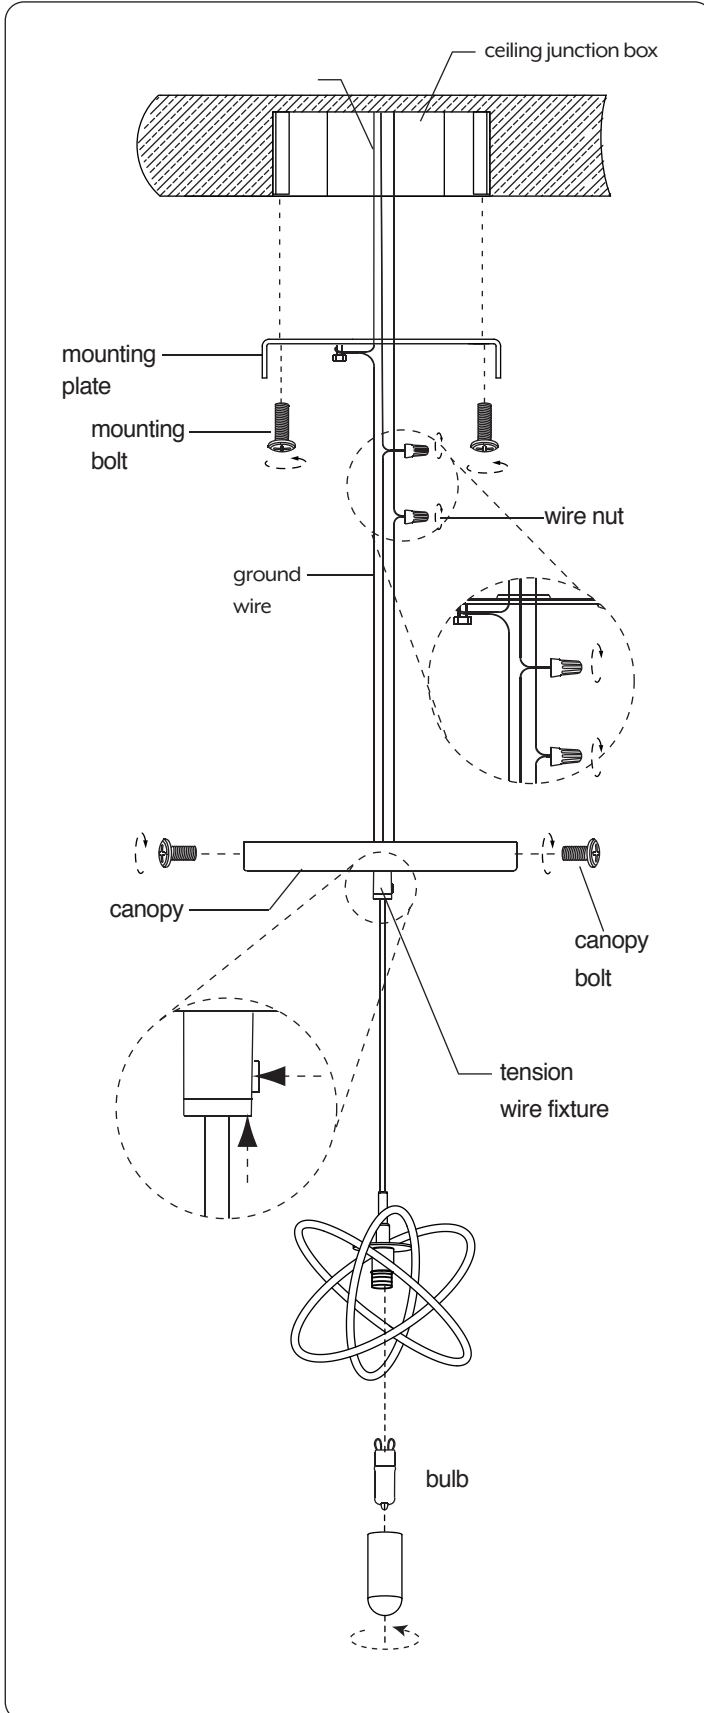

- 1) Shut off the main electrical supply from the main fuse box/circuit breaker.
- 2) Carefully unpack all fixture parts and hardware. Lay items out on a clear workspace.
- 3) Loosen the small screw on the tension wire fixture with a **flat head screwdriver**, and pull the **tension wire** through the **canopy**; make sure there is no slack on the tension wire as shown. Once the tension wire and cord are pulled through to the desired height, tighten the small screw with a **flat head screwdriver** to secure into position. When attaching canopy to mounting plate, neatly coil extra tension wire inside the canopy so it is stored under the mounting plate.
- 4) Place the **mounting plate** over the center of the ceiling junction box.
- 5) Align holes in mounting plate with holes in junction box and attach with 2 **mounting bolts**. Secure bolts with a **phillips head screwdriver**.
- 6) Gently pull wiring down from ceiling junction box and allow it to hang.
- 7) Carefully inspect the pendant's fixture wires:
  - *Neutral fixture wire* = **white**
  - *Hot fixture wire* = **black**
  - *Ground wire* = **green**
- 8) Wrap ground wire of lamp assembly and ground wire of junction box together around ground screw of mounting plate. Tighten the ground screw with a **flat head screwdriver**.
- 9) Attach the neutral fixture wire from the pendant to the neutral junction box wire (usually white). Fasten each together with a **wire nut** and wrap the connection with electrical tape.
- 10) Attach the *hot fixture wire* from the pendant to the *hot junction box wire* (usually black). Fasten each together with a **wire nut** and wrap the connection with electrical tape. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- 11) Gently tuck the wire connections neatly into the ceiling junction box.
- 12) Push **canopy assembly** up over the **mounting plate** until it is flush with the ceiling. Align holes in canopy with holes in mounting plate and secure with 2 **canopy bolts**.
- 13) Insert 1 - **bulb** (not included) into the socket. **DO NOT EXCEED SPECIFIED WATTAGE.**
- 14) Restore power to junction box and test fixture.

Installation is now complete.