

This page lists the contents included in the box. Please take time to identify the hardware as well as the individual components of the product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage. Please follow the assembly instructions closely. Improper assembly can result in personal or property damage. **Note: 2 adults are required to safely install this product.**

CLEANING AND CARE:



Dust surfaces with a dry soft cloth.

★ IMPORTANT SAFETY INSTRUCTIONS:

If you are unsure about your ceiling type or what mounting method you should use, consult a qualified professional or your local hardware store.

We recommend installation of this pendant lamp be performed by a licensed electrician.


Suitable for dry locations only.

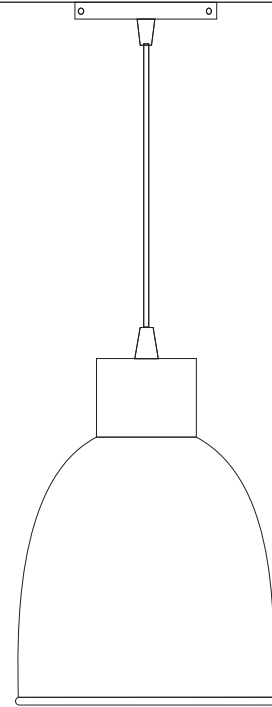

HARDWARE




2 - canopy screws




2 - mounting screws

TOOLS REQUIRED




Phillips head screwdriver

COMPONENTS

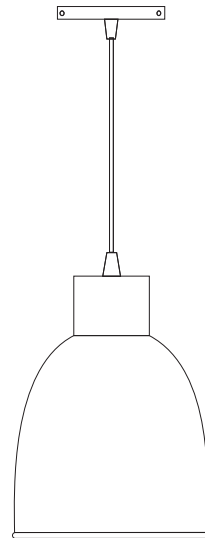

1 - pendant assembly




1 - mounting plate



1 - 13 watt max CFL bulb (NOT INCLUDED)

OR

1 - 60 watt max type A standard bulb (NOT INCLUDED)

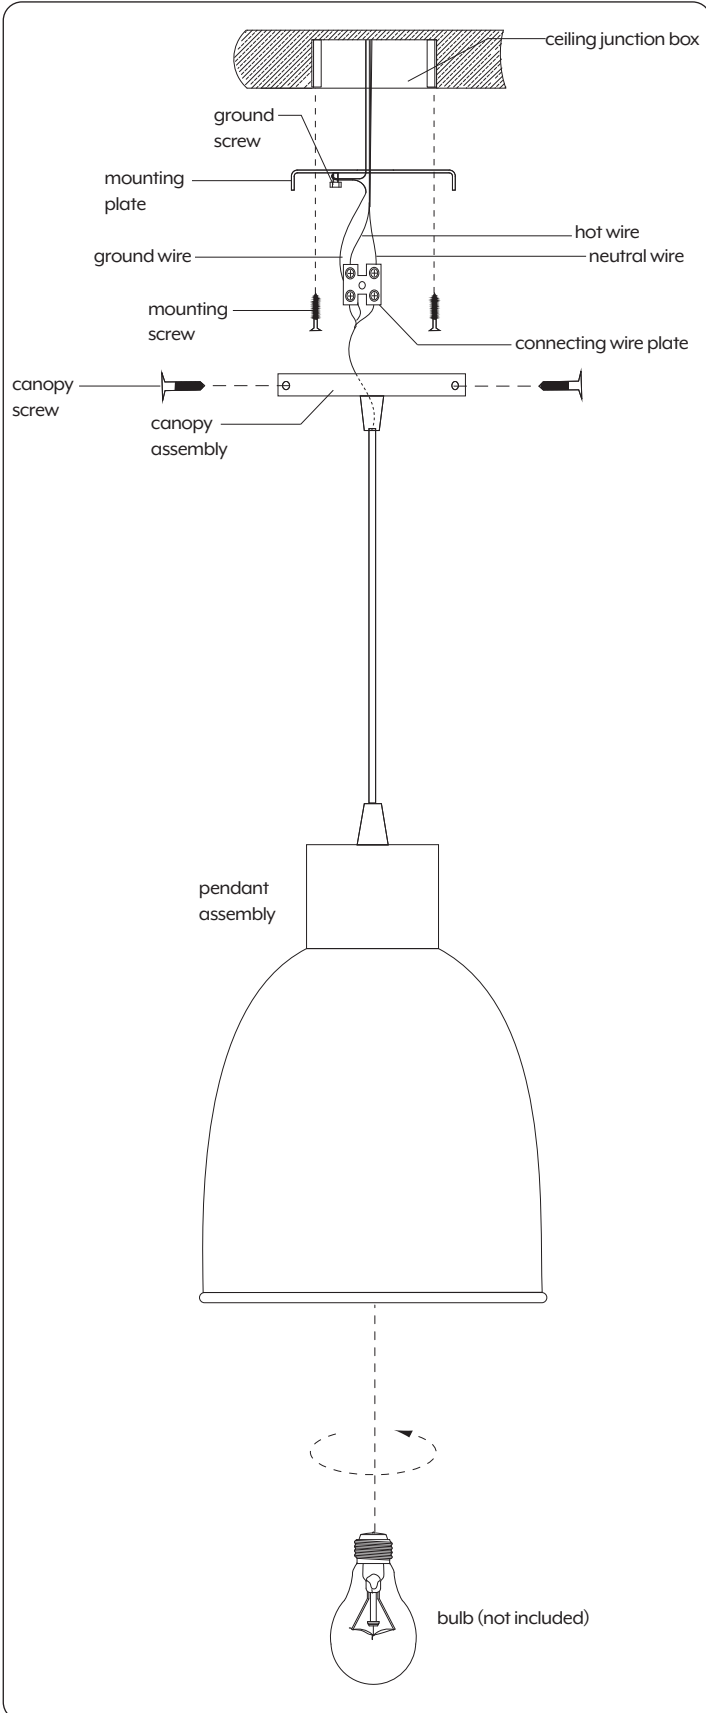

- 1) Shut off the main electrical supply from the main fuse box/circuit breaker.
- 2) Carefully unpack all fixture parts and hardware. Lay items out on a clear workspace.
- 3) Gently pull wiring down from **ceiling junction box** and allow it to hang.
- 4) Place the **mounting plate** over the center of the **ceiling junction box**, and attach with 2 **mounting screws**. Secure screws with a **phillips head screwdriver**.
- 5) Carefully inspect the pendant's fixture wires:
 - **Neutral fixture wire = White**
 - **Hot fixture wire = Black**
 - **Ground wire = Bare copper or Green**
- 6) Securely wrap **ground wire** of pendant and **ground wire** of junction box around the **ground screw** of the **mounting plate**.
- 7) Securely wrap the **neutral fix wire** (usually white) from the junction box around the corresponding screw of the **connecting wire plate**.
- 8) Securely wrap the **hot fix wire** (usually black) from the junction box around the corresponding screw of the **connecting wire plate**.
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- 9) Gently tuck the wire connections neatly into the ceiling junction box.
- 10) Push **canopy** up over the **mounting plate** until it is flush with the ceiling, and secure with 2 **canopy screws**.
- 11) Insert 1-**bulb (not included)** into the socket.
DO NOT EXCEED SPECIFIED WATTAGE.
- 12) Restore power to junction box and test fixture.

Installation is now complete.